



# CCT Bollard LED Light



Date:..... Location: .....

Product:..... Project:.....

Quantity:..... Catalog# .....

## FEATURES

- Efcacy higher than 115 lm/W with zero uplight while consumes 26W.
- Round appearance for good decorative effect, sized in 3.5ft height
- Dark bronze polyester powder-coat nish.
- 360 degrees surround illumination with 80 CRI.
- 1-10V dimming and projected over 50,000 hrs life span.
- Operating temperature is -4°C to 40°C.
- Optional emergency function for emergency needs.
- Robust ground cage pre-buried installation.
- UL/cUL wet location listed and DLC qualied.

## CONSTRUCTION:

Heavy die-cast aluminum alloy housing with black powder-coated finish.

## ELECTRICAL:

Available as 120-277V input,1-10V dimming. -20°C to 45°C

## OPTICAL SYSTEM:

High brightness lumileds 2835LED chips.

## Application:

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

## WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.


## PERFORMANCE

Model NO	Light Efficiency			Wattage	Voltage/CurrentInput		Kelvin Options
	3000K	4000K	5000K		120V	277V	
MBL0126W27VDDKD	110LM	115LM	120LM	26W	0.21A	0.10A	3000K/4000K/5000K


# CCT Bollard LED Light

## Electric Characteristic

Specification/Model	MBL0126W27VDDKD
LED Driver	UL Listed KHM Brand
Input power	26W
Lumens output	3120LM
Efficiency	120LM/W
CRI	>72
Color Temperature	5000K
Input voltage	120-277V/AC
Light distribution type	120D
Working temperature	-40°C+40°C
Junction temperature	<75°C
lamps efficiency	≥90%
Certificate	UL CUL DLC
Equivalent	100-120W MH/HPS

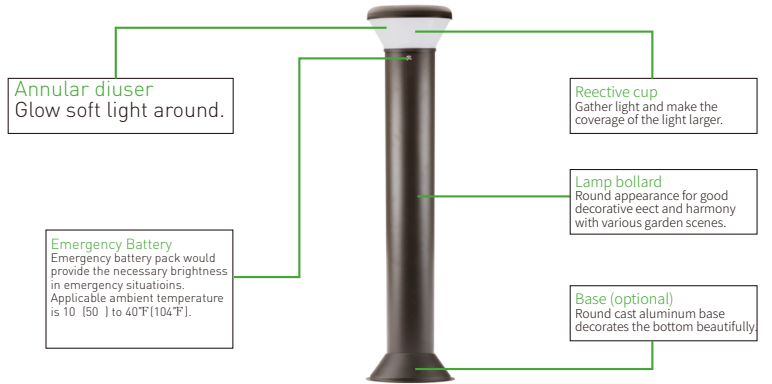

CCT & Power Adjustable



## DIMENSION

unit: inch/mm  
Net Weight:  
26W:12.136 lbs

